

# Doris



## 1. Advantage of LED tri-proof light

LED tri-proof light usually used in environment which requires water-proof, dust-proof and corrosion-proof lighting, and it is widely used in parking lot, food factory, dust factory, cold storage, station and other indoor place. LED tri-proof light can be ceiling mounted and suspension mounted. The lamp adopt PC as eco-friendly material, and it can work stably in a different enviroment, the lamp adopt LEDs of high lumen effect up to 140LM/W, and it can save energy 70% above, built-in sensor and built-in emergency pack, beautiful appearance, convenient to install, suitable for different applications, power supply with iron shell, equipped with high quality LEDs, lifespan up to 50,000

1. Knob buckle, easy to operate, add shockproof and anti-loose bumping, more securely.
2. Screwless wire connection, tool-free(press type wiring)
3. Power supply cooling via metal shell, better cooling effect than the plastic shell
4. Adopt class P power supply, more flexible choice
5. Milky cover and clear cover optional
6. When installation, the buckle can hang the PC cover, convenient to connect wire
7. Quick-connect terminal optional
8. High transmittance top cover, high lighting effect and soft light
9. Plastic shell, low weight, suitable for ceiling and suspension installation
10. PC cover, impact resistance IK08
11. Flicker-free, Sensor, Emergency Pack, Linkable

## 2. Data Sheet of LED tri-proof light



### Model: 2FT-20W

Input Voltage: AC 220-240V

Lumen: 120-140LM/W

Chip: SMD 2835

Driver: Lifud / Boke / Greenso Driver

Driver Option: DALI / 1-10V dimming / Flicker-free

PF > 0.9      CRI > 80

Warranty: 3 Years / 5 Years

CCT: 2500K - 6500K

Protection Class: IP 66

Certification: CE ROHS

Clips Quantity: 6 PCS

Light Option: Sensor / Emergency / Linkable



Cover: Milky Cover / Clear Cover

Product Size: 600\*90\*80MM

Quantity: 9 PCS/CTN

Gross Weight: 11.5 KG/CTN

Packing Size: 710\*350\*320MM/CTN

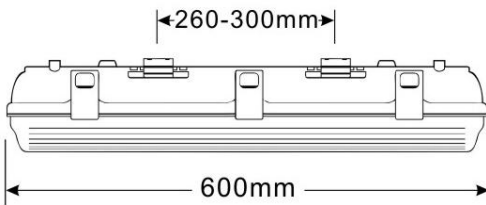



**Model: 2FT-30W**

Input Voltage: AC 220-240V

Lumen: 120-140LM/W

Chip: SMD 2835

Driver: Lifud / Boke / Greenso Driver

Driver Option: DALI / 1-10V dimming / Flicker-free

PF > 0.9      CRI > 80

Warranty: 3 Years / 5 Years

CCT: 2500K - 6500K

Protection Class: IP 66

Certification: CE ROHS

Clips Quantity: 6 PCS

Light Option: Sensor / Emergency / Linkable



Cover: Milky Cover / Clear Cover

Product Size: 600\*120\*86MM

Quantity: 6 PCS/CTN

Gross Weight: 8.5 KG/CTN

Packing Size: 710\*310\*340MM/CTN

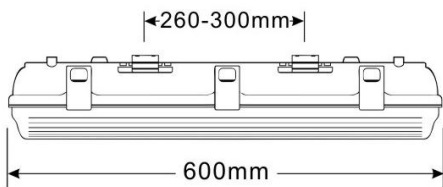

**Model: 4FT-40W**

Input Voltage: AC 220-240V

Lumen: 120-140LM/W

Chip: SMD 2835

Driver: Lifud / Boke / Greenso Driver

Driver Option: DALI / 1-10V dimming / Flicker-free

PF > 0.9      CRI > 80

Warranty: 3 Years / 5 Years

CCT: 2500K - 6500K

Protection Class: IP 66

Certification: CE ROHS

Clips Quantity: 10 PCS

Light Option: Sensor / Emergency / Linkable



Cover: Milky Cover / Clear Cover

Product Size: 1200\*90\*80MM

Quantity: 9 PCS/CTN

Gross Weight: 19.5 KG/CTN

Packing Size: 1310\*350\*320MM/CTN

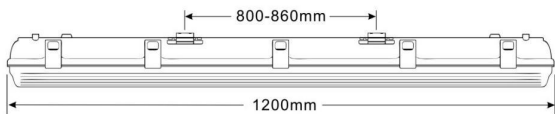

**Model: 4FT-50W / 4FT-60W**

Input Voltage: AC 220-240V

Lumen: 120-140LM/W

Chip: SMD 2835

Driver: Lifud / Boke / Greenso Driver

Driver Option: DALI / 1-10V dimming / Flicker-free

PF > 0.9      CRI > 80

Warranty: 3 Years / 5 Years

CCT: 2500K - 6500K

Protection Class: IP 66

Certification: CE ROHS

Clips Quantity: 10 PCS

Light Option: Sensor / Emergency / Linkable



Cover: Milky Cover / Clear Cover

Product Size: 1200\*120\*86MM

Quantity: 6 PCS/CTN

Gross Weight: 14.6 KG/CTN

Packing Size: 1310\*310\*340MM/CTN

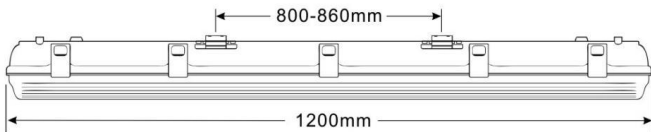

**Model: 5FT-50W**

Input Voltage: AC 220-240V

Lumen: 120-140LM/W

Chip: SMD 2835

Driver: Lifud / Boke / Greenso Driver

Driver Option: DALI / 1-10V dimming / Flicker-free

PF > 0.9      CRI > 80

Warranty: 3 Years / 5 Years

CCT: 2500K - 6500K

Protection Class: IP 66

Certification: CE ROHS

Clips Quantity: 12 PCS

Light Option: Sensor / Emergency / Linkable



Cover: Milky Cover / Clear Cover

Product Size: 1500\*90\*80MM

Quantity: 9 PCS/CTN

Gross Weight: 21 KG/CTN

Packing Size: 1610\*350\*320MM/CTN



**Model: 5FT-60W**

Input Voltage: AC 220-240V

Lumen: 120-140LM/W

Chip: SMD 2835

Driver: Lifud / Boke / Greenso Driver

Driver Option: DALI / 1-10V dimming / Flicker-free

PF > 0.9      CRI > 80

Warranty: 3 Years / 5 Years

CCT: 2500K - 6500K

Protection Class: IP 66

Certification: CE ROHS

Clips Quantity: 12 PCS

Light Option: Sensor / Emergency / Linkable



Cover: Milky Cover / Clear Cover

Product Size: 1500\*120\*86MM


Quantity: 6 PCS/CTN

Gross Weight: 17 KG/CTN

Packing Size: 1710\*310\*340MM/CTN

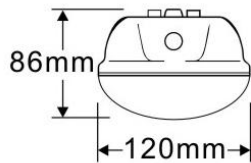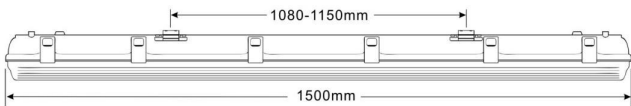

### 3. Installation of LED tri-proof light

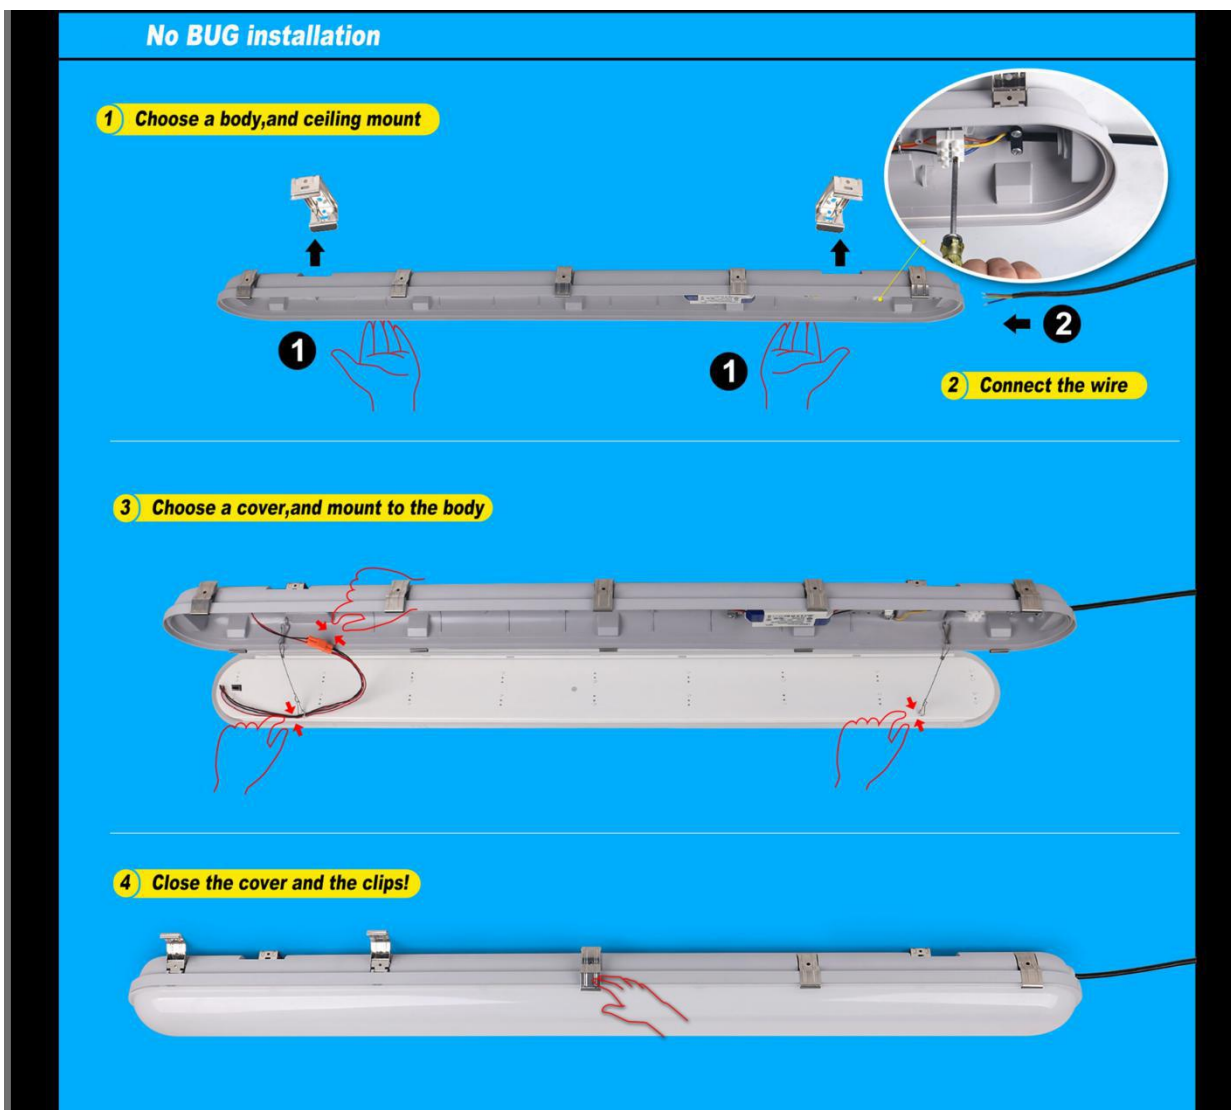



#### 4. Package of LED tri-proof light



**Kontaktuppgifter;**

Bengt Olson  
Mobil; +46(0)737 426990  
[bengt@laljus.se](mailto:bengt@laljus.se)  
[www.laljus.se](http://www.laljus.se)

**Adressuppgifter;**

Andra Tvärgatan 49  
261 35 Landskrona  
SWEDEN

FOR A GREENER SOCIETY

**Laljus**<sup>AB</sup>  
*We LED the way*